



Chocolate Pro Slider

User Manual



 yc.onion

 YC.Onion


 www.yconionmall.com

 YC Onion

 yconionfilm


Follow us for more!

滑轨本体概览

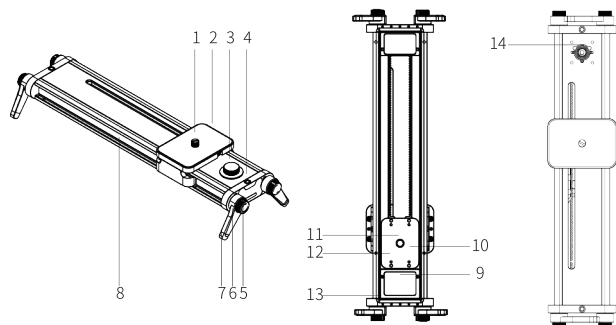


- | | |
|-----------------------|-----------------------------|
| 1、3/8螺丝 | 8、滑轨轨道 |
| 2、上滑块 | 9、护垫 |
| 3、锁定旋钮
(可拆卸装载电机模块) | 10、下滑块 |
| 4、水平仪*2 | 11、3/8螺丝孔
(默认装载1/4螺丝转接孔) |
| 5、阿莱齿支撑脚旋钮锁*4 | 12、配件孔 (小) |
| 6、阿莱齿支撑脚*4 | 13、配件孔 |
| 7、支撑脚胶垫 | 14、模块卡槽 |

桌面模式

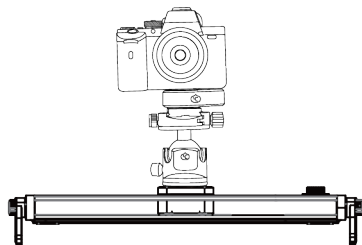




脚架模式

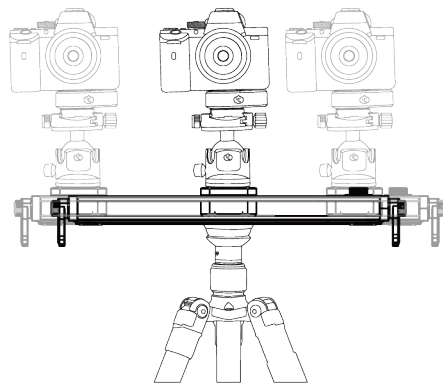

操作指南

- 1、3/8螺丝，可接3/8接口的云台；
- 2、3/8与1/4兼容螺口，默认为1/4接口，用螺丝刀取下转换螺丝即可；
- 3、锁定旋钮可拧紧锁死可固定滑轨，相反拧动可解锁滑轨；
- 4、支撑脚可拧动解锁后360度调节角度使用；
- 5、配件孔可搭配滑轨额外滑轨配件使用（非标配配件皆需另购）；
- 6、搭配脚架使用，获得双倍行程。


电控模块概览



- 1 - 电池仓
- 2 - 电源指示灯
- 3 - 蓝牙指示灯
- 4 - 多功能按键
- 5 - 按键A
- 6 - 按键B
- 7 - 电源开关按键
- 8 - 2.5mm快门线接口
- 9 - 5.5×2.1mm DC 供电接口
- 10 - 模块定位孔
- 11 - 阿莱传动齿
- 12 - 快拆扳手


滑轨供电方式

外置电池供电

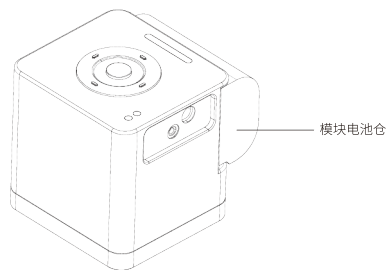

请将标准的 Canon LP-E6 电池（选配）推入模块电池仓内。
2650mAh可持续使用约3小时。




移动电源供电



使用常规的移动电源，通过 5.5×2.1mm DC电源线（标配），
即可为电控模块普通版供电。

（10000mAh移动电源可持续使用约15小时）。

电控模块概览



- 1- 电池仓
- 2- 电源指示灯
- 3- 蓝牙指示灯
- 4- 多功能按键
- 5- 按键A
- 6- 按键B
- 7- 电源开关按键
- 8- 2.5mm快门线接口
- 9- 5.5×2.1mm DC 供电接口
- 10- 模块定位孔
- 11- 阿莱传动齿
- 12- 快拆扳手

模块操作方式

- 1、短按电源开关按键[7]开机。
- 2、长按按键A[5]去到起始点，松开按钮即停按下多功能键[4]设置A点；
长按按键B[6]去到终止点，松开按钮即停按下多功能键[4]设置B点。
A点、B点位置确定后，再按下多功能键[4]进入视频模式
(默认开启“缓启动”功能，如需关闭，请在YC Onion App 上选择关闭)。
- 3、设置完AB点后，
短按按键A[5]，滑块即会往A点方向运行；
短按按键B[6]，滑块即会往B点方向运行；
长按功能键[4]开启或关闭“自动往返”功能。
- 4、“Video”模式下，短按多功能按键[4]可调节三挡不同速度：快 - 中 - 慢。

APP下载




请访问官方网站 <http://yconionapp.com> 下载 YC Onion App，或扫描二维码以获得下载地址。
YC Onion App 支持 Android 6.0 及以上系统，
支持 iOS 11.0 及以上系统。

支持多种语言，更多语言将持续更新。


电机安装方式



- 1、将锁定旋钮拧出；

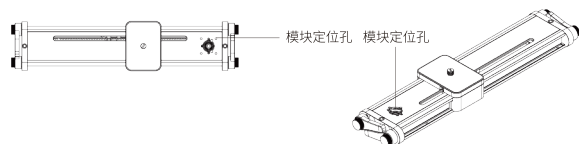

- 2、观察滑轨模块定位孔；

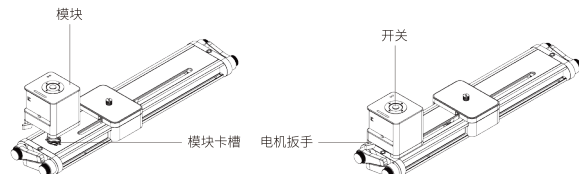

- 3、将模块垂直插入模块卡槽[滑轨14]
(注意电机方向，快拆扳手朝外)；
- 4、将模块快拆扳手锁上；
- 5、插入电池；
- 6、锁住扳手，按下开关即可使用。

规格参数

名称 巧克力PRO滑轨/巧克力PRO电动滑轨

手动版尺寸 400mm*87.4mm*42.3mm/560mm*87.4mm*42.3mm

电动版尺寸 400mm*87.4mm*100mm/560mm*87.4mm*100mm

手动(不含电动模块)版本 1058g/1402g

电动(含电动模块)版本 1300g/1662g

手动版功能 双倍增距、液压阻尼、固定调节与360度支撑腿

电动版功能 起始点设置、视频模式、延时拍摄、多维联动、功能更新

材质 铝合金

螺口标准 上3/8, 下1/4与3/8兼容

滑行距离 单层214mm、双层428mm

续航时间 Canon LP-E6 电池 ≈ 3小时 10000mAh移动电源≈15小时


APP兼容性 Android 6.0 及以上系统 / iOS 11.0 及以上系统

电机桌面模式水平承重 (lb / kg) 44lb / 20kg

桌面模式单层滑轨电机≤45°倾斜承重 (lb / kg) 6.6lb / 3.0kg

使用垂直转接器电机≤90°倾斜承重 (lb / kg) 3.5lb / 1.6kg

工作模式

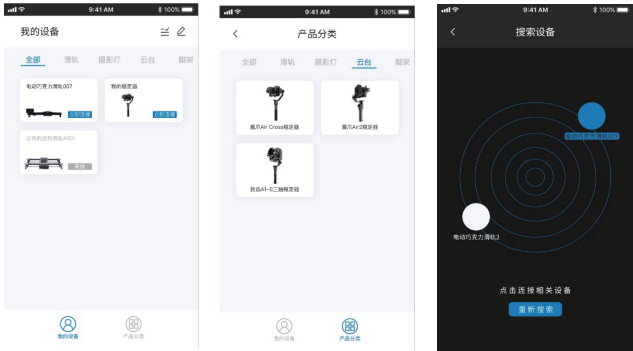

电控模块通电并短按【电源开关按键】开机，
打开手机蓝牙和GPS位置信息，打开 YC Onion 应用程序，
在主页面“产品分类”-“滑轨”中，
选择相对应设备的型号进行搜索，
点中搜索到的设备即可连接。




bilibili



Youtube

更多使用详情，请扫码观看视频教程


桌面模式

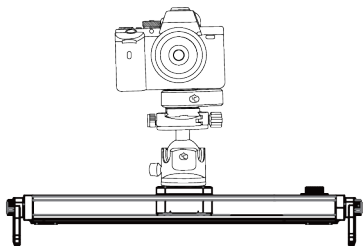


操作指南

- 1、3/8螺丝，可接3/8接口的云台；
- 2、3/8与1/4兼容螺口，默认为1/4接口，用螺丝刀取下转换螺丝即可；
- 3、锁定旋钮可拧紧锁死可固定滑轨，相反拧动可解锁滑轨；
- 4、支撑脚可拧动解锁后360度调节角度使用；
- 5、配件孔可搭配滑轨额外滑轨配件使用（非标配配件皆需另购）；
- 6、搭配脚架使用，获得双倍行程。


脚架模式

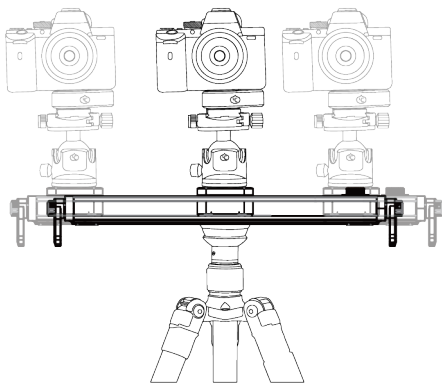



電機安裝方式




1、將鎖定旋鈕擰出；



2、觀察滑軌模塊定位孔；




3、將模塊垂直插入模塊卡槽[滑軌14]
(注意電機方向，快拆扳手朝外)；



4、將模塊快拆扳手鎖上；
5、插入電池；
6、鎖住扳手，按下開關即可使用。


滑軌供電管道

外置電池供電

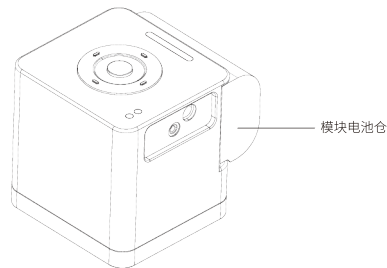


請將標準的Canon LP-E6電池（選配）推入模塊電池倉內。
2650mAh永續使用約3小時。

移動電源供電



使用常規的移動電源，通過5.5×2.1mm DC電源線（標配），
即可為電控模塊普通版供電。
(10000mAh移動電源永續使用約15小時)。

工作模式

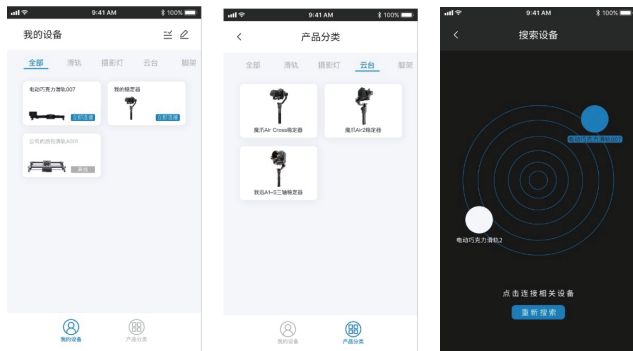

電控模塊通電並短按【電源開關按鍵】開機，
打開手機藍牙和GPS位置資訊，打開YC Onion應用程序，
在主頁面“產品分類”-“滑軌”中，
選擇相對應設備的型號進行蒐索，
點中蒐索到的設備即可連接。



bilibili



Youtube

更多使用詳情，請掃碼觀看視頻教程

模塊操作管道

- 1、短按電源開關按鍵[7]開機。
- 2、長按按鍵A[5]去到起始點，鬆開按鈕即停按下多功能鍵[4]設定A點；
長按按鍵B[6]去到終止點，鬆開按鈕即停按下多功能鍵[4]設定B點。
A點、B點位置確定後，再按下多功能鍵[4]進入視頻模式
(默認開啟“緩啟動”功能，如需關閉，請在YC Onion App上選擇關閉)。
- 3、設定完AB點後，
短按按鍵A[5]，滑塊即會往A點方向運行；
短按按鍵B[6]，滑塊即會往B點方向運行；
長按功能鍵[4]開啟或關閉“自動往返”功能。
- 4、“Video”模式下，短按多功能按鍵[4]可調節三擋不同速度：快-中-慢。


APP下載



請訪問官方網站<http://yconionapp.com>下載YC
Onion App，或掃描二維碼以獲得下載地址。
YC Onion App支持Android 6.0及以上系統，支持
iOS 11.0及以上系統。

支持多種語言，更多語言將持續更新。

滑軌本體概覽

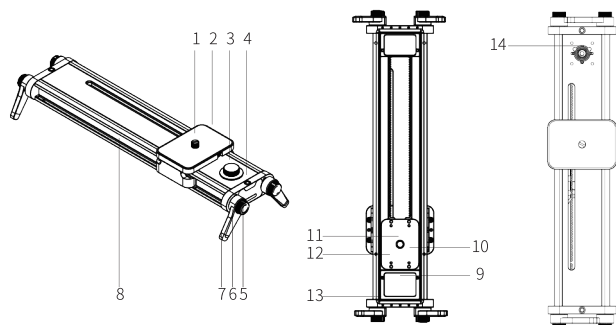

- | | |
|-----------------------|-----------------------------|
| 1、3/8螺絲 | 8、滑軌軌道 |
| 2、上滑塊 | 9、護墊 |
| 3、鎖定旋鈕
(可拆卸裝載電機模塊) | 10、下滑塊 |
| 4、水平儀*2 | 11、3/8螺絲孔
(默認裝載1/4螺絲轉接孔) |
| 5、阿萊齒支撐腳旋鈕鎖*4 | 12、配件孔 (小) |
| 6、阿萊齒支撐腳*4 | 13、配件孔 |
| 7、支撐腳膠墊 | 14、模塊卡槽 |

規格參數

名稱 巧克力PRO滑軌/巧克力PRO電動滑軌

手動版尺寸 400mm*87.4mm*42.3mm/560mm*87.4mm*42.3mm

電動版尺寸 400mm*87.4mm*100mm/560mm*87.4mm*100mm

手動(不含電動模塊)版本 1058g/1402g

電動(含電動模塊)版本 1300g/1662g

手動版功能 雙倍增距、液壓阻尼、固定調節與360度支撐腿

電動版功能 起始點設定、視頻模式、延時拍攝、多元聯動、功能更新

材質 鋁合金

螺口標準 上3/8, 下1/4與3/8相容

滑行距離 單層214mm、雙層428mm

續航時間 Canon LP-E6電池≈3小時10000mAh移動電源≈15小時


APP相容性 Android 6.0及以上系統/iOS 11.0及以上系統

電機案頭模式水准承重 (lb / kg) 44lb / 20kg

案頭模式單層滑軌電機≤45°傾斜承重 (lb / kg) 6.6lb / 3.0kg


使用垂直轉接器電機≤90°傾斜承重 (lb / kg) 3.5lb / 1.6kg

Slider Overview

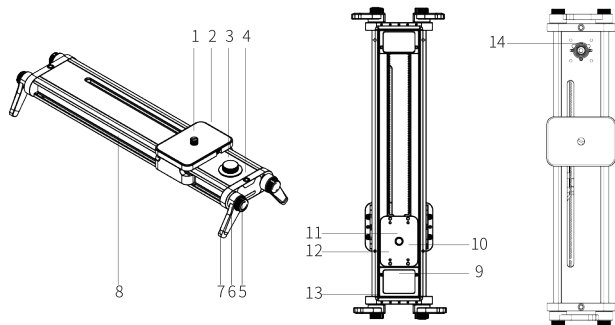


- | | |
|---|------------------------------|
| 1. 3/8 Mounting Screw | 8. Slider Track |
| 2. Upper Sliding Block | 9. Protection Pad |
| 3. Locking Knob
(Removable for Motor) | 10. Lower Sliding Block |
| 4. Gradienter*2
(1/4 screw hole adapter is included) | 11. 3/8 Mounting Port |
| 5. ARRI Rossete Upholders
Locking Knob*4 | 12. Accessories Hole (small) |
| 6. ARRI Rossete Upholders*4 | 13. Accessories Hole |
| 7. Upholders' Rubber Pad | 14. Module Fixation Slot |

Desk Top Mode

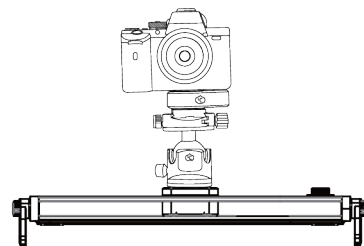




Tripod Mode

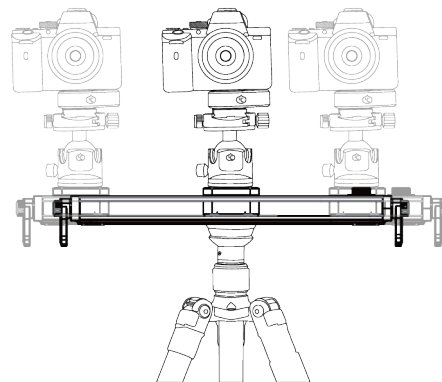

Operation guide

1. 3/8 Mounting Screw , Able to connect to ball head with 3/8 interface;
2. 3/8 OR 1/4 Mounting Port , 1/4 interface is default. If you need 3/8 interface, please use a screwdriver to take the transformational screw down;
3. Screw the locking knob to lock the slider, screw opposite to unlock;
4. Unscrew to adjust the upholders freely;
5. Accessories holes for additional accessories for slider.
(non standard configuration accessories are sold separately);
6. Pair with tripod to gain double length.


PRODUCT OVERVIEW



- 1 - Battery Compartment
- 2 - Power Indicator
- 3 - Bluetooth Indicator
- 4 - Multi-function Button
- 5 - Button A
- 6 - Button B
- 7 - Power Button
- 8 - 2.5mm Shutter Cable Port
- 9 - DC Power Port
- 10 - Module Orientation Hole
- 11 - Arri Transmission Gear
- 12 - Quick Release Wrench


POWER SUPPLY WAY

External Battery Supply

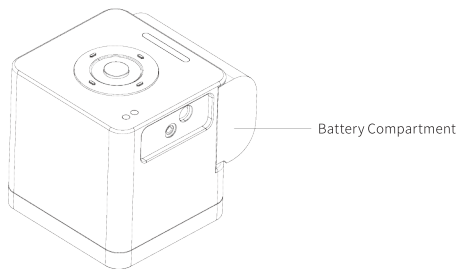


Insert a standard Canon LP-E6 battery (optionl) into the battery compartment on the module.
(2650mAh lasts about 3 hours)

Power Bank Supply

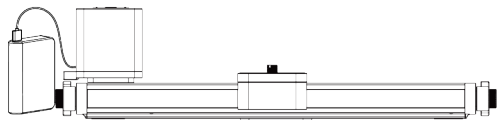

Using a normal Power Bank and a 5.5x2.1 mm DC power cable (standard) to power the module.
(10000mAh lasts about 15 hours)


Motor Installation Instruction

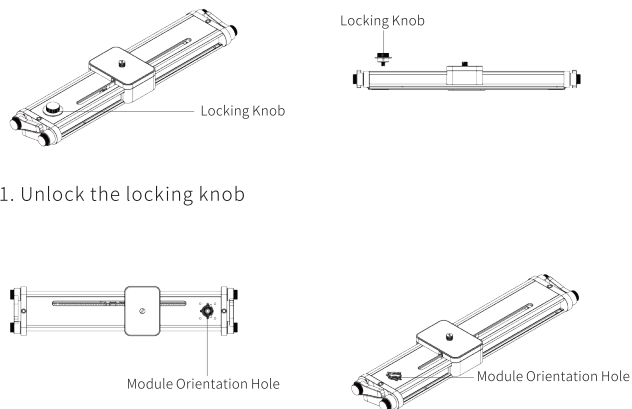

1. Unlock the locking knob



2. Observe the module orientation hole

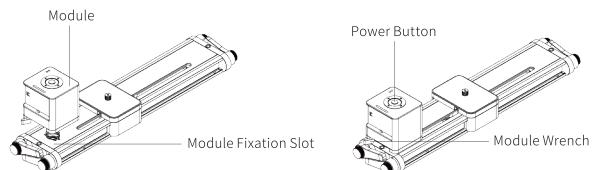

3. Insert the module into the fixation slot[Rail 10]
(Pay attention to the module direction, quick release wrench should be facing outward)

4. Lock the quick release wrench
5. Insert battery
6. Quick Release Wrench, press power button to activate

MOTOR CONTROL INSTRUCTIONS

1. Short press the power button[7] to turn on the motor.
2. Long press button A[5] to move to starting point, release to stop, press the multi-function button[4] to set point A.
Long press button B[6] to move to starting point, release to stop, press the multi-function button[4] to set point B.
After point A & B are confirmed, press multi-function button again to enter VIDEO mode.
3. After setting point A & B
Short press button A[5], the Sliding block will move towards point A;
Short press button B[6], the Sliding block will move towards point B;
Long Press Function Button [4] to turn on /off "cycle" mode.
4. In VIDEO mode, short press multi-function button to switch from 3 adjustable speed: Fast-Medium-Slow


APP Download



Please head over to official APP website
<http://yconionapp.com> to download YC Onion App
Or scan the QR code to download
YC Onion App requires Android 6.0 or later, IOS 11.0 or later

Supports multiple languages, more languages will be added

BLUETOOTH PAIRING

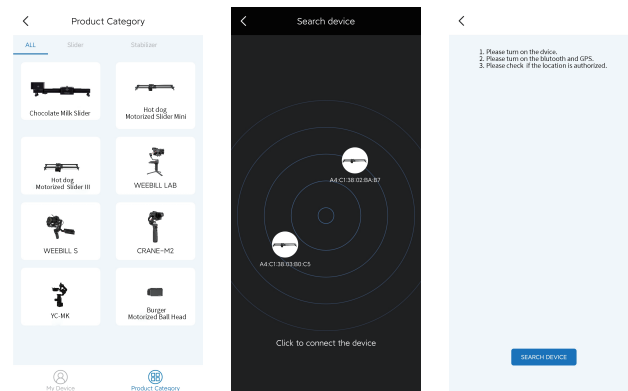

Power the module and short press power button to turn on,
Turn on smartphone Bluetooth and GPS, open YC Onion App,
Enter 'product categories' - 'Slider',
Choose the according device to search,
Click the icon to pair.



bilibili



Youtube

For more details, scan the QR code above
to watch tutorials videos.

Specifications

Name: Chocolate Pro Slider/Chocolate Pro Milk Slider

Size Manual: 400mm*87.4mm*42.3mm/560mm*87.4mm*42.3mm

Motorized: 400mm*87.4mm*100mm/560mm*87.4mm*100mm

Manual (electronic module not included): 1058g/1402g

Motorized (electronic module included): 1300g/1662g

Function included Manual: double deck long travel distance, hydraulic damper, 360 degree adjustable fixation upholders.

Motorized: starting/ending point setting, video mode, time-lapse mode, multi-dimensional interlink, firmware update

Material: Aluminum alloy

Screw standard: 3/8 on top, 1/4 and 3/8 at the bottom

Camera Travel: single deck 214mm, double deck 428mm

Running Time: Canon LP-E6 battery≈3 hours
10000mha power bank≈ 15 hours

APP Compatibility: Android 6.0 or later, IOS 11.0 or later

Motor Horizontal Load-bearings (lb /kg) : 44lb /20kg

Desktop mode Motor ≤45° Tilt Load-bearings (lb /kg) : 6.6lb /3.0kg

Motor ≤90° Tilt Load-bearings (lb /kg) : 3.5lb /1.6kg

警告和免责声明

- 1.对于本产品，本公司不承担终端客户对本产品所有调试和使用当中的风险和责任（包括直接、间接或者第三方的损失）；
- 2.我公司对于任何从非正常渠道获取的产品，将不予任何服务；
- 3.由于产品固件程序的升级和更改，有可能造成本说明书中描述的功能有变动，升级固件前请仔细阅读升级说明；
- 4.可能存在因产品硬件升级改造后与本说明书不符的描述，请以官网发布的最新产品信息为准；
- 5.本公司对本产品保留一切解释权利。

保修信息

用户信息

姓名 _____ 电话 _____

邮箱 _____ 地址 _____

产品信息

产品名称 _____

产品型号 _____

出厂日期 _____

保险期限 _____

保修条例

- 1.本产品自购买日期起保修一年；
- 2.擅自拆卸产品以及人为造成的损坏概不保修。

ECS_A_UM_1.0



警告和免责声明

- 1.对于本产品，本公司不承担终端客户对本产品所有调试和使用当中的风险和责任（包括直接、间接或者第三方的损失）；
- 2.我公司对于任何从非正常渠道获取的产品，将不予任何服务；
- 3.由于产品固件程序的升级和更改，有可能造成本说明书中描述的功能有变动，升级固件前请仔细阅读升级说明；
- 4.可能存在因产品硬件升级改造后与本说明书不符的描述，请以官网发布的最新产品信息为准；
- 5.本公司对本产品保留一切解释权利。

保修信息

用户信息

姓名 _____ 电话 _____

邮箱 _____ 地址 _____

产品信息

产品名称 _____

产品型号 _____

出厂日期 _____

保险期限 _____

保修条例

- 1.本产品自购买日期起保修一年；
- 2.擅自拆卸产品以及人为造成的损坏概不保修。

ECS_A_UM_1.0



DISCLAIMER

1. The Company assumes no liability for any risks related to or resulting from the debug and use of this product (including the direct, indirect or third-party losses).
2. For any unknown sources of acquitting this product, we will not be at any services.
3. The updating and changes of product firmware and program may cause changes in function descriptions in this user manual, please read the instructions carefully before upgrading the firmware and use the corresponding user manual.
4. There may be a description that does not conform to this specification after firmware upgrade of the product. Please be subject to the latest product information which is issued in official website.
5. The Company reserves all rights of interpretation to this product.

Warranty Information

Client Info

Name _____ Phone _____

E-Mail Address _____ Address _____

Product Information

Product Name _____

Product Model _____

Date of Manufacture _____

Warranty Period _____

Warranty Regulations

1. The warranty is guaranteed for 1 year from the date of purchase;
2. Some states or countries have no limitations on how long your confidentiality is guaranteed, so the above warranty period may not apply.
3. Unauthorized disassembly or damage caused by users are not covered by warranty.

ECS_A_UM_1.0

